
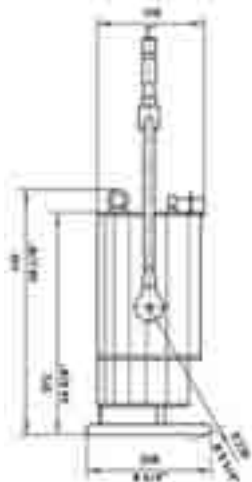


ARRI X5

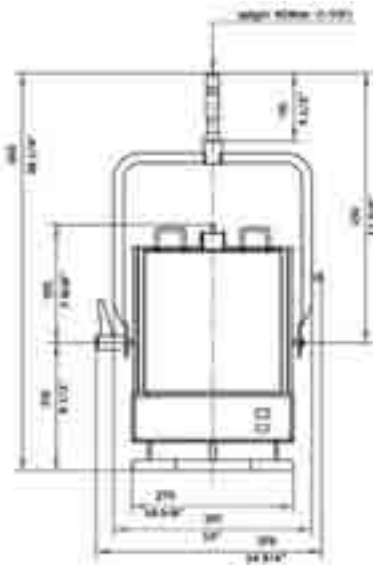

Cat. No. Description

505400	ARRI X5
505203	25 ft. Head/Ballast Cable
505204	50 ft. Head/Ballast Cable
505201	100 ft. Head/Ballast Cable
505410	Four Leaf Barndoor
505421	Frosted Glass Diffuser
505424	Black Reflector
539425	Intensifier
539426	Chimera 1/4 Diffusion Screen (for Intensifier)
539428	Chimera 1/2 Diffusion Screen
539429	Chimera Full Diffusion Screen
539427	Chimera 50° Soft Egg Crate (for Intensifier)
505245	575W Single Ended HMI Lamp
504806	400/575W Electronic Ballast w/ALF
504807	400/575W Electronic Ballast w/DMX & ALF
505810	575/1200W Electronic Ballast w/DMX & ALF
505815	575/1200W Electronic Ballast w/DMX
505490	Lamphead Case
504920	Electronic Ballast Case (400/575W)
505921	Electronic Ballast Case (575/1200W)

Photometric Data

Distance	5 ft. (1.5 m)	10 ft. (3.0 m)	15 ft. (4.6 m)	20 ft. (6.1 m)
Beam (127°)				
Footcandles	320	80	36	20
Beam Diameter	20.1 ft. (6.1 m)	40.1 ft. (12.2 m)	60.2 ft. (18.3 m)	80.2 ft. (24.4 m)

Performance at any distance:

$$\text{Footcandles (or lux)} = 8,000 \div \text{Distance}^2 \quad \text{Beam Diameter} = \text{Distance} \times 4.01$$

Specifications

Weight	16.6 lbs. (7.5 kg)
Reflector	High purity aluminum
Lampholder	G38 High Voltage
Mounting	5/8" (16 mm) stand mount
Safety Glass	Clear safety glass

For Ballast Specifications see Ballast Section

X5 INTENSIFIER & DIFFUSER

To create a great daylight softlight use the Intensifier and Diffuser with the ARRI X5